


Assembly instruction

TS 454613 telescopic slide
with touch-to-open feature



1.



Pay attention to minimum distance between body and drawer!

2.



Installation length according to product description

3.



Convenient installation due to separable inner rail.

4.



Side walls of the cabinet body must be parallel.

5.



Side walls of the cabinet body must be flush at the front.

6.



Outer rail must run parallel to the floor.

Assembly instruction

TS 454613 telescopic slide with touch-to-open feature



7.



Outer rails must be flush and parallel at the front.

8.



The outer rail can be fixed in the slotted holes with screws and still be aligned. e.g. with 4 mm round-head screw (not supplied).
Screws can optionally be removed after installation.

9.



Fasten the outer rail with screws.
For metal body e.g. with flat head screw M4x8,
with wooden body e.g. with flat head screw 4x14
(available in our online shop).

10.




Inner rail can be fixed with screws in the slotted holes e.g. with round-head screw 4mm (not supplied).
Screws can be optionally removed again after installation.

11.



Fasten the inner rail with screws.
For metal body e.g. with flat head screw M4x10,
for wooden body e.g. with flat head screw 4x14
(available in our online shop).

12.

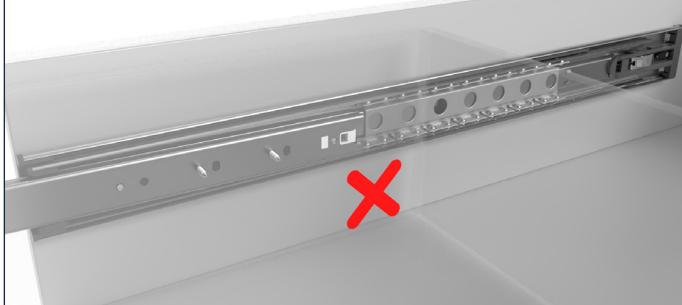


Incorrect handling can cause the rail to tilt.
No liability is accepted for damage to the ball cage caused by incorrect reinsertion.

Assembly instruction

TS 454613 telescopic slide
with touch-to-open feature



13.

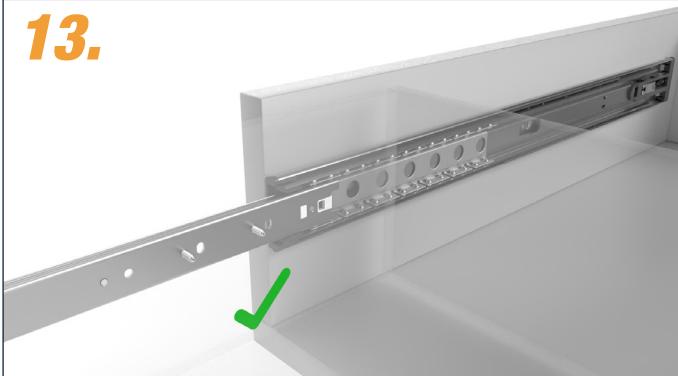

Before installation, the ball cage must be pushed forward.

14.



A light tap on the front opens the drawer.

15.



When installed in vehicles, these pull-outs must be secured separately.

16.



Further information and a suitable installation video can be found on our website www.multislides.eu